

Technical Specification

IPE95e 95W IEEE802.3bt Gigabit Industrial

PoE Injector

Version: 1.0

Version number	Reason for Amendment	Month/Year of issue	Prepared by	change impact (on cost, installation, capacity expansion, etc.)
V1.0	First version	2023.10	Peter Qiu	

October, 2023

1 Description

IPE95e is an Industrial hardened Gigabit single-port PoE+ IEEE 802.3bt / LTPoE++ 95W 10/100/1000Base-TX PoE Injector with 12~48V DC Input and Voltage Booster. It allows you to connect the PoE device such as camera and access point with a non PoE LAN switch within the distance of 100m. Both the Ethernet port (to switch) and the PoE Out port (to PoE device) support 10/100/1000Base-T and are compliant with IEEE 802.3ab. It provides 95W PoE output.

2 Product Picture




Product Pictures

3 Feature

- 1 RJ45 Ethernet Data Input Port + 1 RJ45 Power over Ethernet Output Port (Data + Power)
- Support 95W LTPoE++ Power Sourcing Equipment
- Complies with IEEE 802.3at/bt PoE end-span/mid-span PSE
- Support 10/100/1000Base-TX
- Extensive LED indicators for PoE diagnostics
- 12~48V DC wide range power input with power booster function
- Up to 95-watt PoE budget (48VDC), 95-watt PoE budget (24VDC), 60-watt PoE budget (12VDC)
- Supports DIN-Rail and Wall-mount installation
- Environmentally Hardened -40°C to 80°C

4 Application

5

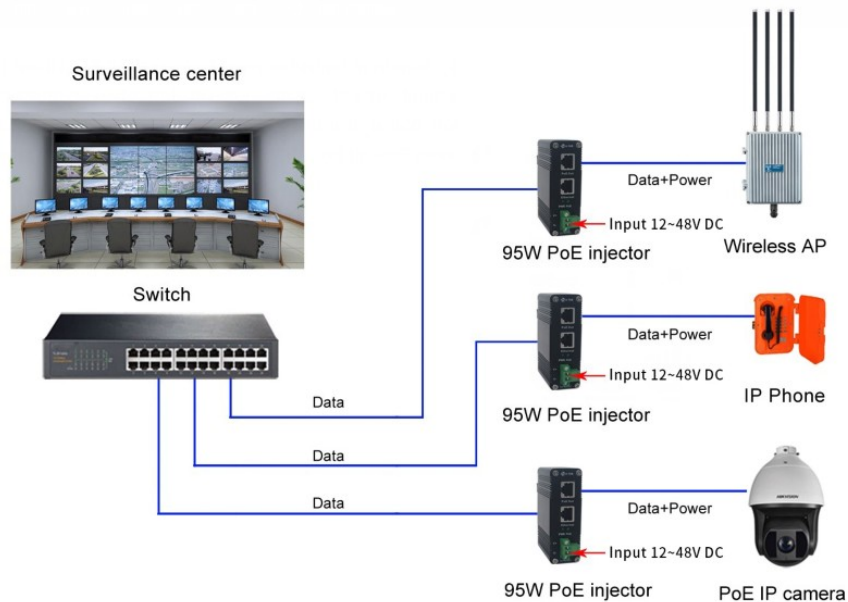

Specifications

Ethernet	
Standards:	IEEE802.3 10 BASE-T Ethernet IEEE802.3u 100 BASE-TX Fast Ethernet IEEE 802.3ab 1000BASE-T Gigabit Ethernet IEEE802.3 x Flow Control
Processing Type:	Forward Half-duplex, Full-duplex
Forward Filter Rate:	1,488,000pps (1000Mbps)
Cabling:	Twisted-pair cable up to 100 meters (328ft) 10BASE-T: 4-pair UTP Cat. 3, 4, 5, 5e, 6, 6A 100BASE-TX: 4-pair UTP Cat. 5, 5e, 6, 6A 1000BASE-T: 4-pair UTP Cat. 5e, 6, 6A
Maximum Distance:	Cat5 UTP up to 100m
Connector:	2x RJ45
Environmental	
Operating Temperature:	-40°C to 80°C (-40°F to 176°F)

Storage Temperature:	-40°C to 85°C (-40°F to 185°F)
Relative Humidity:	5% to 95% non-condensing
MTBF:	>200,000hrs
Electrical and Mechanical	
Input Power:	12~48VDC (Terminal Block)
Power Consumption:	120W Max.
Power over Ethernet:	
Standard:	IEEE 802.3bt 4-pair Power over Ethernet
	IEEE 802.3at Power over Ethernet Plus
	IEEE 802.3af Power over Ethernet
Port:	RJ45
Power Pin Assignment	Data provide over pairs 1,2TX and 3,6RX Power over spare pairs 1,2,4,5(+) and 3,6,7,8(-)
PoE Budget:	Up to 95-watt PoE budget (48VDC) Up to 95-watt PoE budget (24VDC) Up to 60-watt PoE budget (12VDC)
LED Indicators:	
Power:	Power Status
PoE:	PoE Status
Dimensions (WxDxH):	95 x 70 x 30 mm
Weight:	0.25Kg
Casing:	IP40 Aluminum Case
Mounting Options:	DIN-Rail / Wall-mount
Standard Accessories	
Package Contents	LNK-INJ-48-95W
	User's manual
	Wall-mount kit
	DIN-mount kit
Regulatory Approvals	
ISO9001	
FCC part 15, Class A	
EN55022:2006+A1: 2007 Class A	
Surge Protection:	
RJ45: 1KV	
Power: 500V	
ESD: 4KV/8KV	

6 Order Information

Models	
IPE95e	IEEE802.3bt Gigabit Industrial PoE Injector (95W)

Sailtel reserves the right to make changes to the products or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such products or information.

Published by Sailtel

Copyright © 

All Rights Reserved